



N.T.S.


GENERAL NOTES

1. ALL DIMENSIONS ARE TO FACE OF FINISH U.O.N.
2. ACOUSTICAL PANEL INSTALLATION: INSTALL ACOUSTICAL PANELS WITH EDGES IN CLOSE CONTACT WITH METAL SUPPORTS AND IN TRUE ALIGNMENT.
3. INSTALL SYSTEM AFTER MAJOR ABOVE CEILING WORK IS COMPLETE. COORDINATE LOCATIONS OF HANGERS WITH RELATED WORK.

DOOR TYPES

- NOTES:
1. ALL DOORS ARE TO BE 1 3/4" THICK U.N.O.
 2. ALL EXTERIOR H.M. DOORS TO BE INSULATED
 3. FILL ALL VOIDS IN THRESHOLDS W/ GROUT
 4. ALL THRESHOLDS TO MEET ADA/ANSI

FRAME TYPES

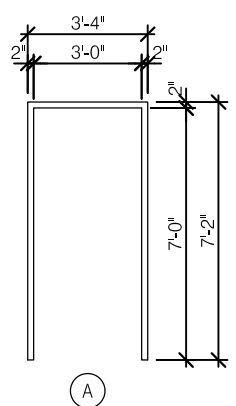

DOOR HARDWARE SCHEDULE	DOOR NOTES
<u>HARDWARE SET #1</u>	
1/2" PAIR HINGES, 4/2"x4 1/2"	1. MOUNT DOOR CLOSERS ON RESTROOM SIDE ONLY.
PANIC HARDWARE	2. MOUNT KICKPLATE ON PUSH SIDE ONLY.
FULL LENGTH LATCH PROTECTOR	
CLOSER	3. MAXIMUM DOOR OPERATING PRESSURE: ~5 LBS. INTERIOR, 15 LBS. EXTERIOR.
10x10 W/VE GLASS	
KICKPLATE - STAINLESS STEEL 10"x35/50x2" L.T.D.W. THRESHOLD	4. ADA COMPLAINT ACCESSIBILITY SIGNALAGE, INCLUDE BRAILLE AS REQUIRED BY (LOCAL JURISDICTION - (1)) UNISEX.
REST CONTROL DOOR SWEEP	
ACCESSIBLE SIGNAGE - VISUAL, GRAPHIC CHARACTERS & BRAILLE PER ANSI A117.1, 703 & KBC 1013.4	
<u>HARDWARE SET #2</u>	
1/2" PAIR HINGES, 4/2"x4 1/2"	5. RESTROOM SIGN REQUIRED.
WALL STOP	6. FRAMES SHALL BE PAINTED.
OFFICE LOCKSET	7. COMMERCIAL GRADE HARDWARE REQUIRED.
	8. ALL HARDWARE SHALL BE ADA/LEVER TYPE W/ PUSH BUTTON TYPE LOCKS.
	9. ALL THRESHOLDS SHALL MEET ADA ROOMTS.
	11. ALL DOORS & HARDWARE SHALL BE PROVIDED & INSTALLED TO MEET BOTH ANSI & ADA REQUIREMENTS.



DIMENSIONAL FLOOR PLAN

A1.1 $3/16'' = 1'-0''$

OFFICE BUILDING
NORTH ESTILL AVENUE
RICHMOND, KY 40475

MADISON UNITED
SOCCER ASSOCIATION

PRACTICE SPACE

N. ESTILL AVE., SUITE 201
RICHMOND, KY 40475



PLAN DATE:	03-30-21
PROJECT NUMBER:	21004
BUILDING TYPE:	FIT-UP
DRAWN BY:	CES

LS
DESIGN GROUP PLLC
LONNIE SMITH ARCHITECT

phone 859.624.3755
fax 859.624.3745

519 Hampton Way, Suite 8
Richmond KY 40475

DIMENSIONAL FLOOR PLAN

A1.1