


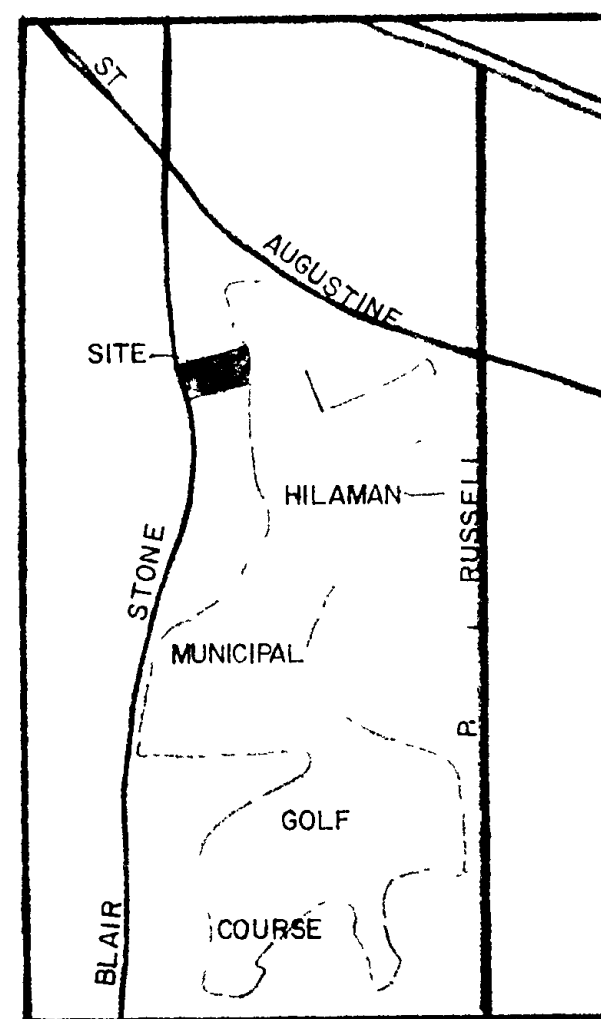


TREE SCHEDULE
STATE EMPLOYEES CREDIT UNION


TREE NUMBER	TREE SPECIES	SIZE DBH	PRESERVE	REMOVE
1	PINE	10"	X	
2	PINE	11"	X	
3	PINE	10"	X	
4	DOGWOOD	1"	X	
5	PINE	12"	X	
6	MAPLE	4"	X	
7	PINE	10"	X	
8	PINE	8"	X	
9	PINE	12"	X	
10	PINE	8"	X	
11	MAPLE	6"	X	
12	SCRUB	4"	X	
13	SYCAMORE	8"	X	
14	PEAR	3"	X	
15	PINE	9"	X	
16	PINE	5"	X	
17	PINE	11"	X	
18	PINE	10"	X	
19	MAPLE	9"	X	
20	MAPLE	8"	X	
21	MAPLE	6"	X	
22	MAPLE	9"	X	
23	HOLLEY	4"	X	
24	HOLLEY	4"	X	
25	HOLLEY	4"	X	
26	HOLLEY	4"	X	

- OPERATION AND MAINTENANCE
1. MAINTAIN EXISTING PLANT MATERIAL IN LIVING CONDITION
 2. WATER AND FERTILIZE PLANT MATERIAL AND GRASSES AS NEEDED TO MAINTAIN IN LIVING CONDITION
 3. REPAIR DAMAGE TO LANDSCAPING CAUSED BY VEHICLES OR EROSION
 4. KEEP OUTLET PIPE FREE FROM CLOGGING DURING AND AFTER RAINFALL


- SEQUENCE OF CONSTRUCTION
1. SET OUT SEDIMENTATION BARRIERS AND TREE PROTECTION
 2. EXCAVATE POND EXTENSION AND REMOVE EXCAVATED MATL
 3. ROUGH GRADE, CONSTRUCT BASE AND PAVE WITHIN 24 HRS
 4. INSTALL GROUND COVERS AND SOD
 5. INSTALL SIGNAGE
 6. REMOVE TEMPORARIES

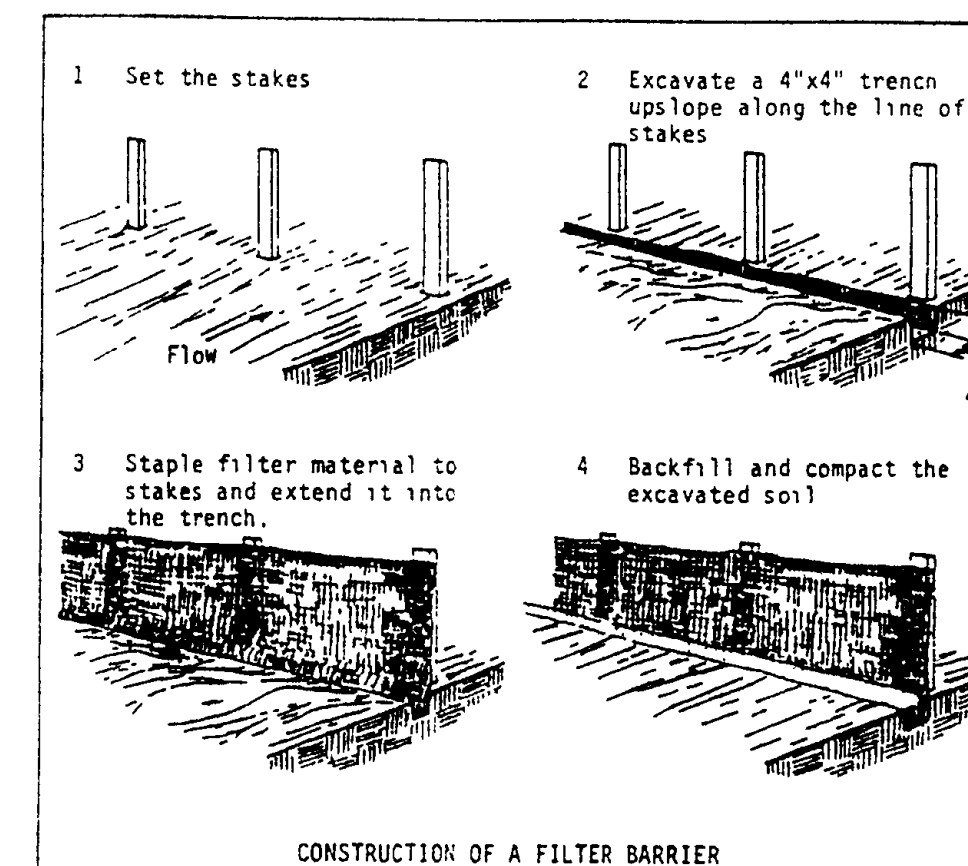

Source: Installation of Straw and Fabric Filter Barriers for Sediment Control, Sherwood and Hyatt Plate 106a

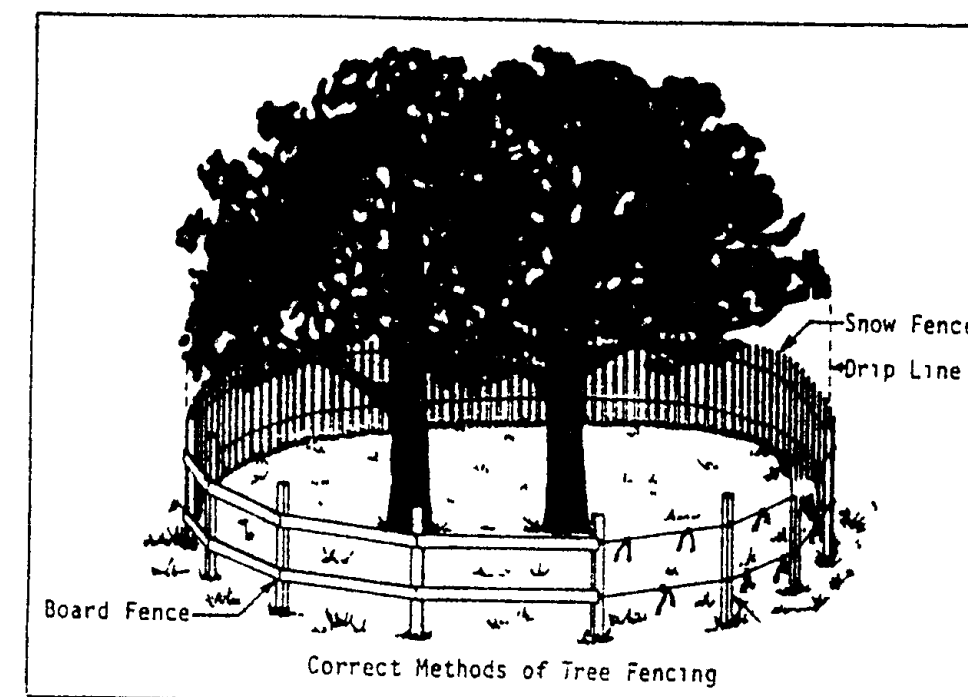

1. PLACE EXCAVATION DIRECTLY ON TRUCKS, AND REMOVE FROM THE SITE. DISPOSE OF PROPERLY.
2. INSTALL FILTER FABRIC FENCE IN ACCORDANCE WITH DETAIL ON DOWNSLOPE FROM ANY SOIL OR VEGETATIVE DISTURBANCE ACTIVITY.
3. FINISH PAVEMENT SHALL BE INSTALLED WITHIN 24 HOURS OF ROUGH GRADING AND SOIL CEMENTING. SOIL CEMENT SHALL BE PLACED THE SAME DAY AS ROUGH GRADING, WEATHER PERMITTING, OR AS SOON AS POSSIBLE THEREAFTER.
4. ALL PAVING SHOWN EXCLUDING SHADED AREA IS EXISTING ON-SITE.

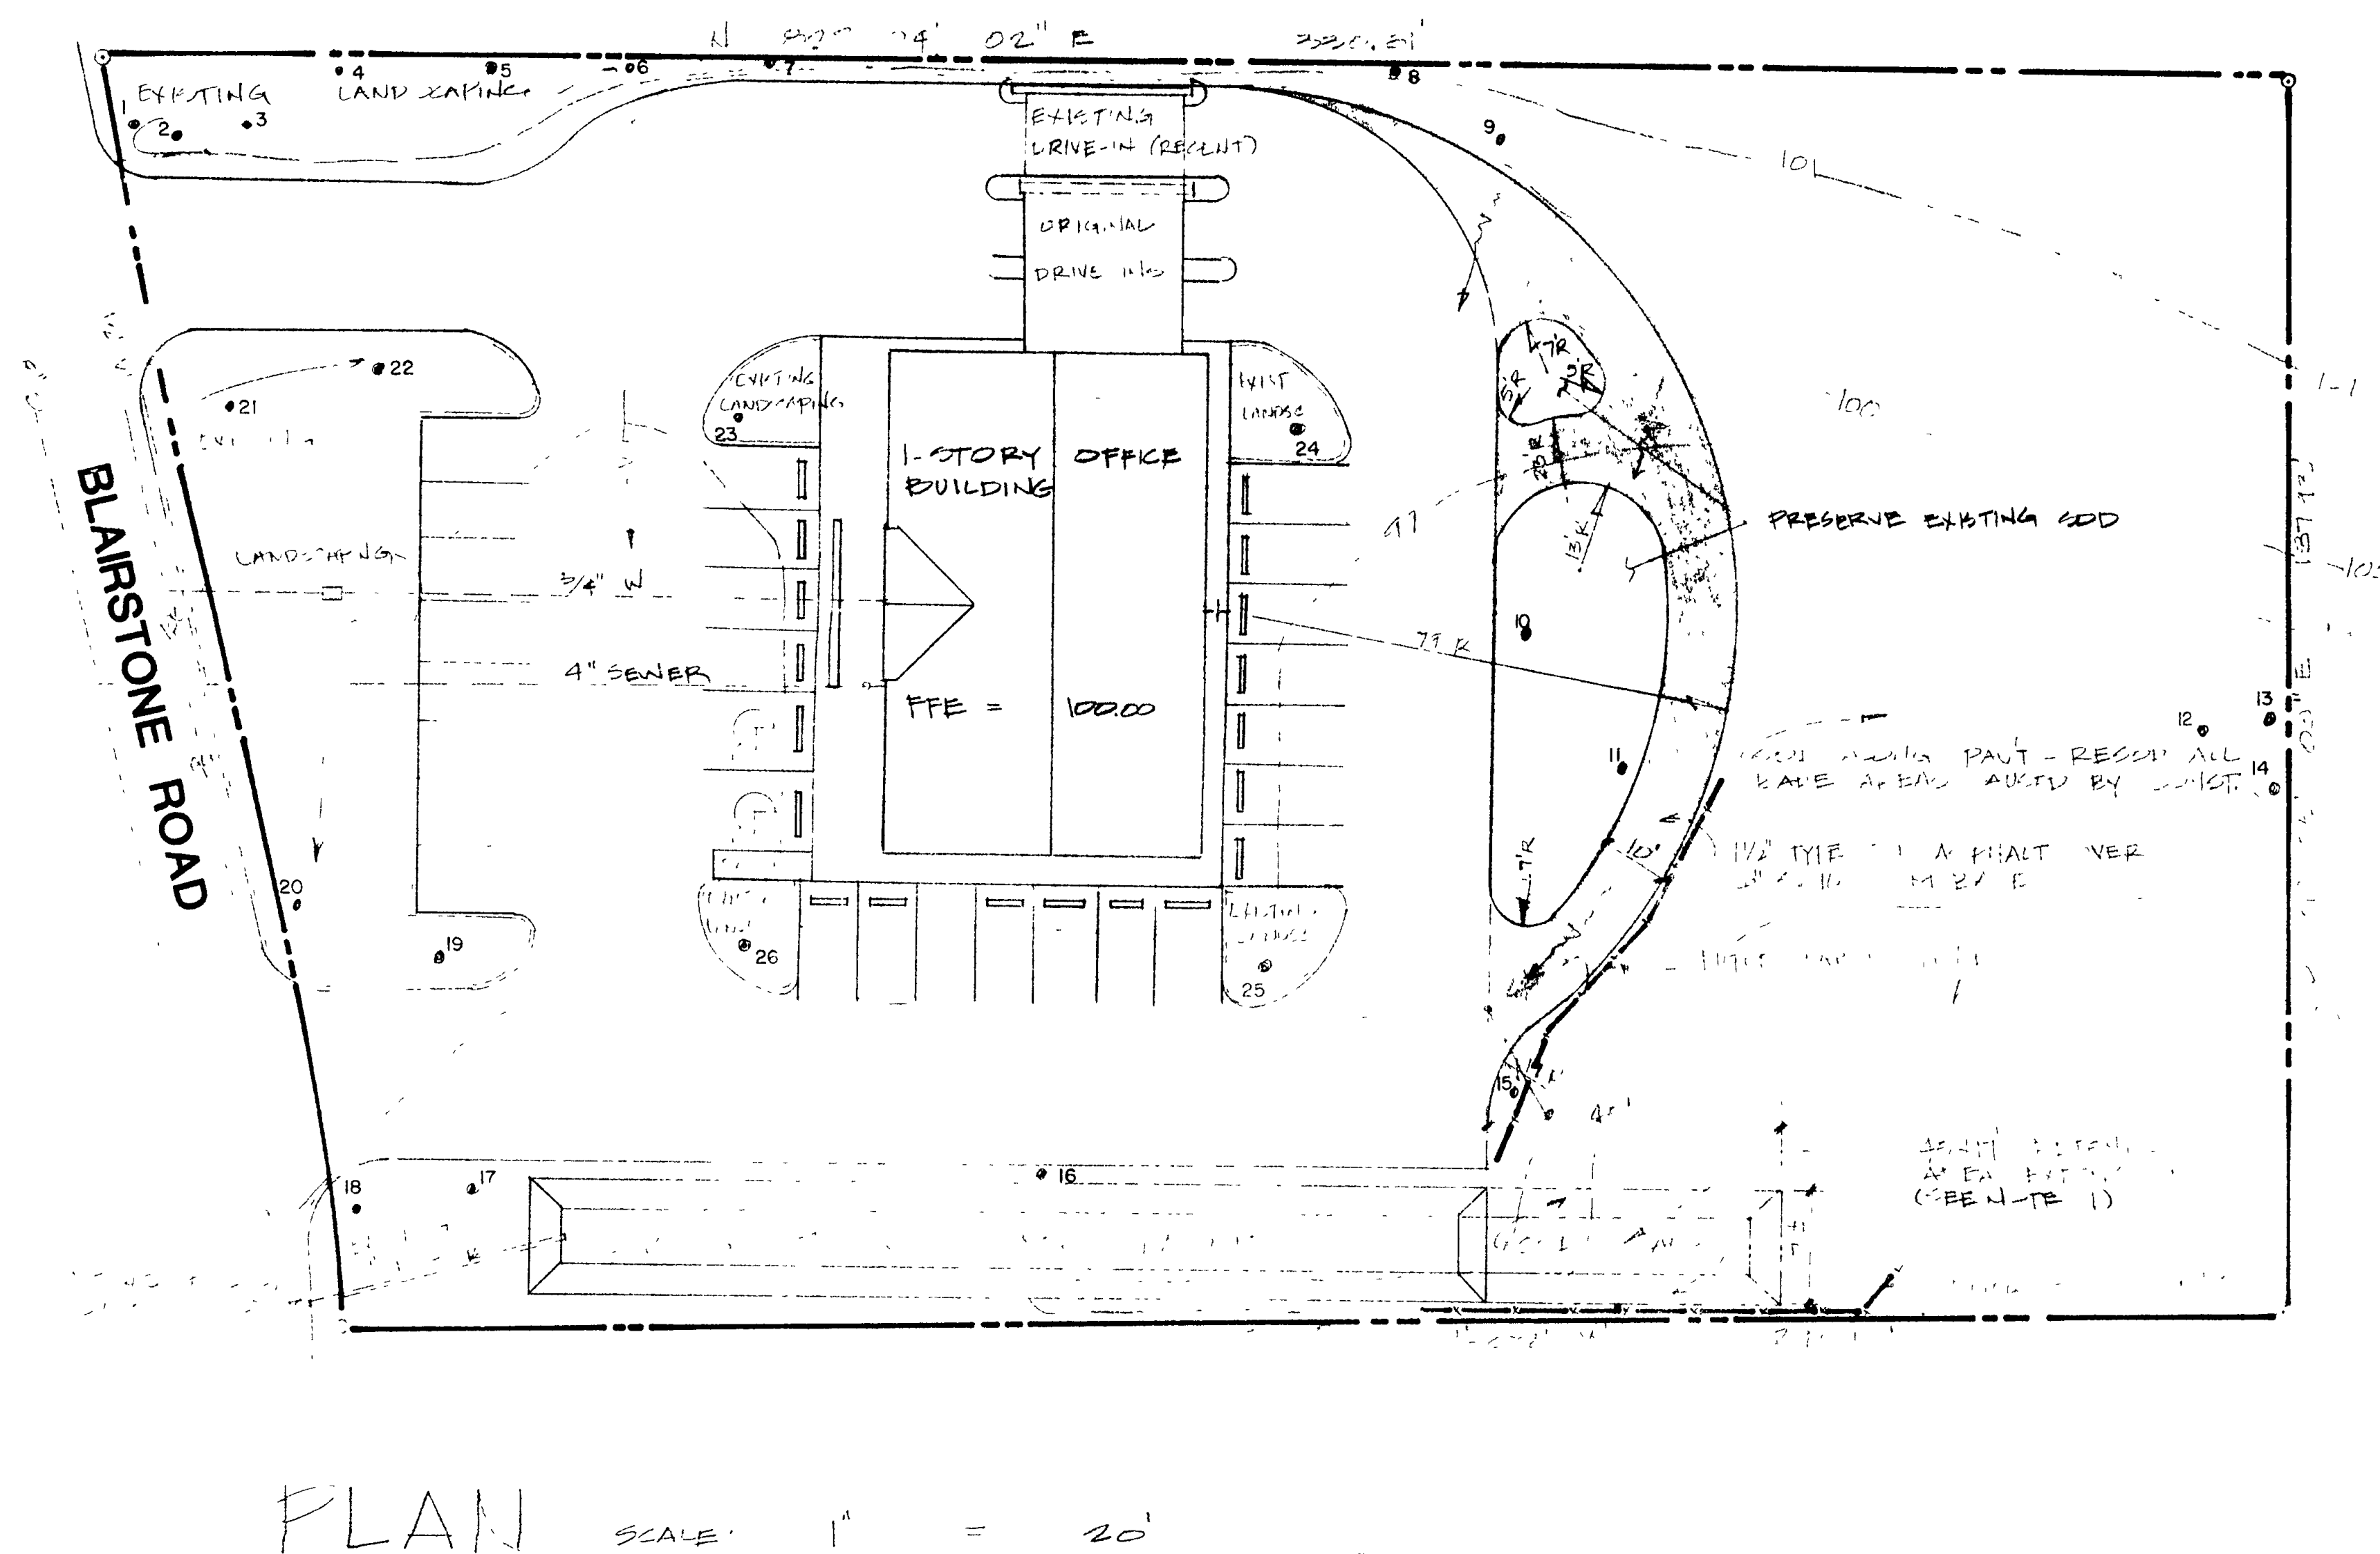

HILAMAN GOLF COURSE

